


END LOADER RIGID MOUNT WASHER-EXTRACTORS

DW SERIES

INDUSTRIAL STRENGTH WASHER-EXTRACTOR SPECIFICATIONS

Model	DW100	DW150	DW200	DW300	DW400
Capacity	100 lb.	150 lb.	200 lb.	300 lb.	400 lb.
Cylinder Size	42" x 25"	48" x 26"	48" x 33"	54" x 42"	60" x 42"
Cubic Content	20.05 cu. ft.	27.21	34.54	55.64	68.69
Water Inlets (Hot & Cold)	1-1/4" NPT	2" NPT	2" NPT	2" NPT	2" NPT
Drain	4" N.O.	6" N.O.	6" N.O.	8" N.O.	8" N.O.
Inverter Motor HP	10 h.p.	15 h.p.	20 h.p.	30 h.p.	40 h.p.
G-Force at High Extract	232 G	237 G	288 G	299 G	306 G
Circuit Breaker	30 Amp	30 Amp	50 Amp	80 Amp	100 Amp
Control Programs	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50
Features	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting
Dimensions (overall)					
Width	63-1/2"	67-5/8"	68"	79-1/4"	84-3/8"
Depth	47-1/2"	48"	60-3/8"	69-5/8"	69-5/8"
Height	73"	73-1/4"	75"	83-3/8"	88-1/4"
Net Weight	2,800 lb.	3,300 lb.	3,500 lb.	4,900 lb.	6,600 lb.


Model shown and Overall Dimensions include optional DynOzone - DynaWash® Ozone System.
Standard voltage is 230/3/60. Consult factory for other available electrical voltages.
Field programmable speeds.

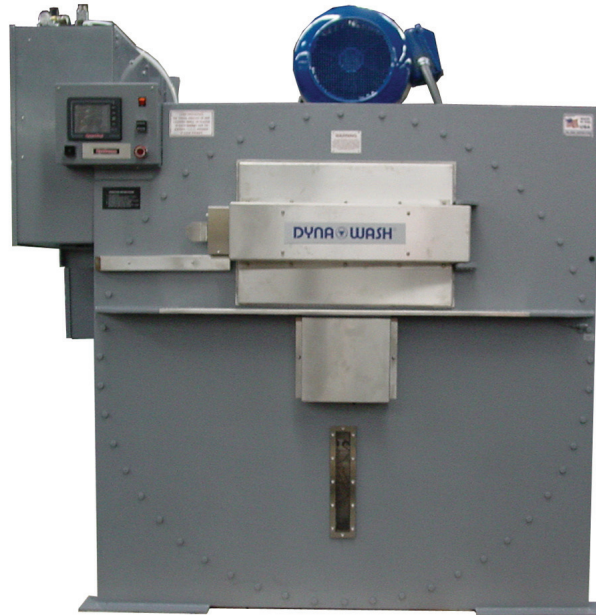

EQUIPPED WITH DYNATROL HMI TOUCH SCREEN

DynOzone

AVAILABLE WITH THE REVOLUTIONARY
DYNOZONE - DYNAWASH® OZONE SYSTEM



EXCLUSIVE "3-D" THREE POCKET
BASKET DESIGN

WWW.EDRODYNAWASH.COM

The EDRO Corporation

37 Commerce Street - P.O. Box 308

East Berlin, CT 06023-0308 USA

Fax (860) 828.5984 Phone (860) 828.0311