


PASS THRU RIGID MOUNT BARRIER TYPE WASHER-EXTRACTORS

DWPT SERIES

INDUSTRIAL STRENGTH WASHER-EXTRACTOR SPECIFICATIONS

Model	DW100PT	DW150PT	DW200PT
Capacity	100 lb.	150 lb.	200 lb.
Cylinder Size	42" x 25"	48" x 26"	48" x 33"
Cubic Content	20.05 cu. ft.	27.21	34.54
Water Inlets (Hot & Cold)	1-1/4" NPT	2" NPT	2" NPT
Steam Inlet	1"	1"	1"
Drain	4" N.O.	6" N.O.	6" N.O.
Extract Motor HP	5.5 h.p.	7.5 h.p.	7.5 h.p.
G-Force at High Extract	232 G	237 G	229 G
Circuit Breaker	30 Amp	50 Amp	50 Amp
Control Programs	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50
Features	Productivity Reporting	Productivity Reporting	Productivity Reporting
Dimensions (overall)			
Width	72"	82"	89"
Depth	48"	48"	57"
Height	69"	71"	71"
Net Weight	3,100 lb.	3,600 lb.	3,800 lb.

Standard voltage is 230/3/60. Consult factory for other available electrical voltages.

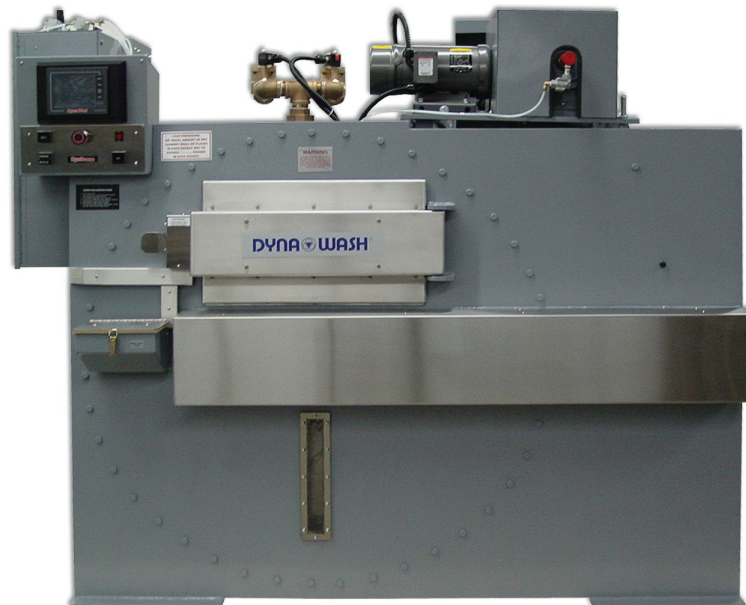

EQUIPPED WITH DYNATROL HMI TOUCH SCREEN

DynOzone

EQUIPPED WITH THE REVOLUTIONARY
DYNOZONE - DYNAWASH® OZONE SYSTEM



EXCLUSIVE "3-D" THREE POCKET
BASKET DESIGN

WWW.EDRODYNAWASH.COM

The EDRO Corporation
37 Commerce Street - P.O. Box 308
East Berlin, CT 06023-0308 USA

Fax (860) 828.5984 Phone (860) 828.0311