


END LOADER SOFT MOUNT WASHER-EXTRACTORS

DW SERIES

INDUSTRIAL STRENGTH WASHER-EXTRACTOR SPECIFICATIONS

Model	DW100SM	DW150SM	DW200SM	DW300SM	DW400SM
Capacity	100 lb.	150 lb.	200 lb.	300 lb.	400 lb.
Cylinder Size	42" x 25"	48" x 26"	48" x 33"	54" x 42"	60" x 42"
Cubic Content	20.05 cu. ft.	27.21	34.54	55.64	68.69
Water Inlets (Hot & Cold)	1-1/4" NPT	2" NPT	2" NPT	2" NPT	2" NPT
Drain	4" N.O.	6" N.O.	6" N.O.	8" N.O.	8" N.O.
Inverter Motor HP	10 h.p.	15 h.p.	20 h.p.	30 h.p.	40 h.p.
G-Force at High Extract	232 G	237 G	288 G	299 G	306 G
Circuit Breaker	30 Amp	30 Amp	50 Amp	80 Amp	100 Amp
Control Programs	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50	HMi Touch Screen 50
Features	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting
Dimensions (overall)					
Width	86"	92"	90-1/2"	100"	110-3/4"
Depth	48"	53"	60"	69-3/8"	69-3/8"
Height	77"	74-3/4"	74-3/4"	83-7/8"	91"
Net Weight	4,500 lb.	6,725 lb.	7,200 lb.	9,100 lb.	11,930 lb.

Model shown with optional forward tilting and autoswing door.
Standard voltage is 230/3/60. Consult factory for other available electrical voltages.
Field programmable speeds.

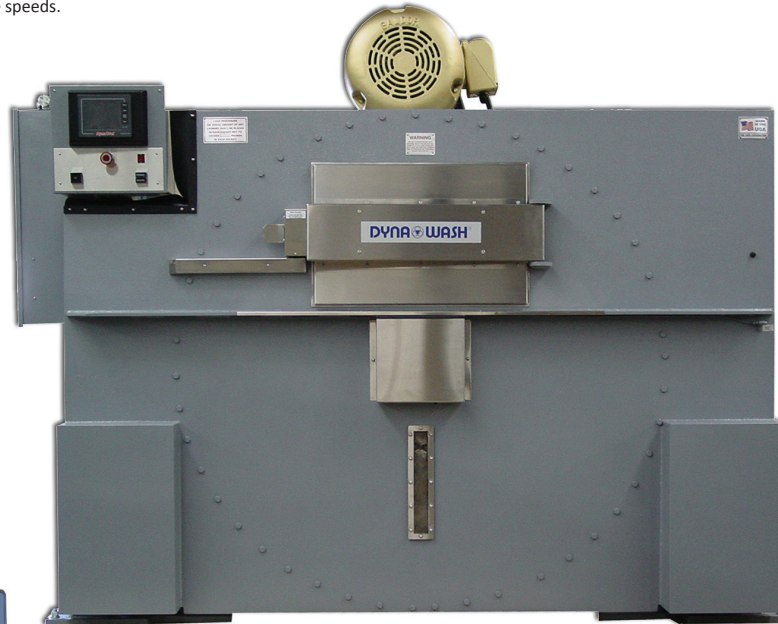

EQUIPPED WITH DYNATROL HMI TOUCH SCREEN

DynOzone

AVAILABLE WITH THE REVOLUTIONARY
DYNOZONE - DYNAWASH® OZONE SYSTEM



EXCLUSIVE "3-D" THREE POCKET
BASKET DESIGN

WWW.EDRODYNAWASH.COM

The EDRO Corporation
37 Commerce Street - P.O. Box 308

East Berlin, CT 06023-0308 USA

Fax (860) 828.5984 Phone (860) 828.0311