

# U.S. NAVY SHIPBOARD


## WASHER-EXTRACTOR



# DW2000MNSWE

MILITARY SPEC WASHER-EXTRACTOR

## SPECIFICATIONS

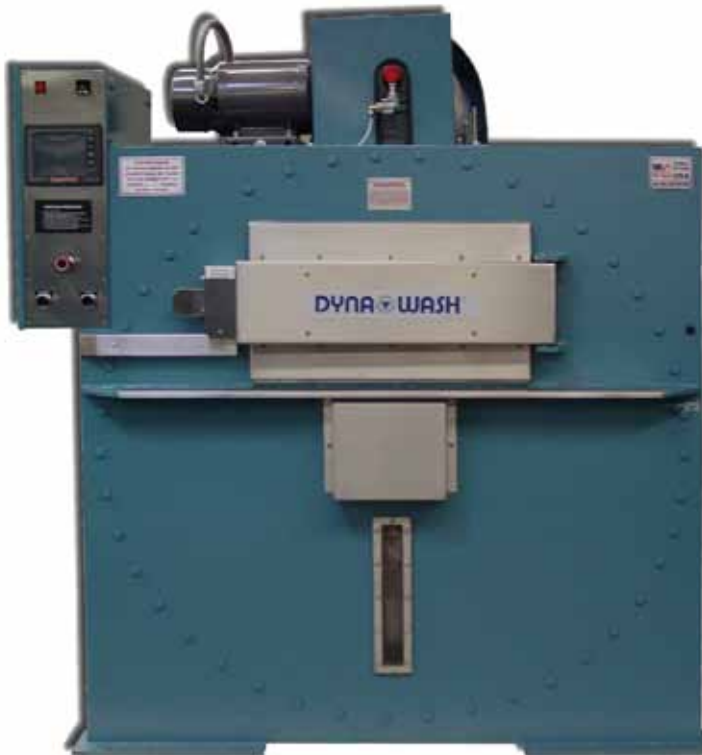

DW2000MNSWE-14A

Specifications		
Capacity	200 lb., three pocket	
Cylinder Size	48" x 33"	
Cubic Content	34.54 cu. ft.	
Potable Water Inlets	2" NPT, up to 150 PSI, Hot & Cold	
Sewer Drain	6" NPT N.O.	
Low Air Pressure	1/4" NPT @ 80-100 PSI, 3.5 cu.ft./hr.	
Electrical Service	440/3/60, maximum demand AMPS/10 SEC: 9	
Wash Motor	2 h.p., 1750 rpm, 3.2 FLA	
Extract Motor	2.5/2.5 h.p., 1675/840, 5.8/9.0 FLA	
Low Extract	295 RPM / 59 G	
High Extract	590 RPM / 237 G	
Model	-14A	-24A
Type	Steam	Electric
Class	Touch Screen	Touch Screen
Style	Non-Modular	Non-Modular
Heating Requirements (Steam / Electric)	1-1/4" NPT Supply & 3/4" NPT Return up to 125 PSI	54 kW
<i>Dimensions (overall)</i>		
Width	66"	66"
Depth	57"	57"
Height	72"	72"
Net Weight	3,300 lbs.	3,300 lbs.

Manufactured in accordance with CID A-A-59469.

Type I = Steam Heating; Type II = Electric Booster Heating

Class 4 = Touch Screen Control

Style A = non-Modular; Style B = Modular (Hatchable)

All models equipped with 2 motor, 3 speed drive with 2-speed extract.

\*Dimensions rounded to nearest inch. Consult factory for Installation Data Drawing with exact foundation and installation requirements.

Consult Factory for "ER" option for installations with bulkhead or access restrictions.



EQUIPPED WITH DYNATROL HMI TOUCH SCREEN



The EDRO Corporation

37 Commerce Street - P.O. Box 308

East Berlin, CT 06023-0308 USA

Fax (860) 828.5984 Phone (860) 828.0311

[www.edrodynawash.com](http://www.edrodynawash.com)