


# PASS THRU SOFT MOUNT BARRIER TYPE WASHER-EXTRACTORS

## DWPT SERIES

### INDUSTRIAL STRENGTH WASHER-EXTRACTOR SPECIFICATIONS

Model	DW100PTSM	DW150PTSM	DW200PTSM	DW300PTSM	DW400PTSM
Capacity	100 lb.	150 lb.	200 lb.	300 lb.	400 lb.
Cylinder Size	42" x 25"	48" x 26"	48" x 33"	54" x 42"	60" x 42"
Cubic Content	20.05 cu. ft.	27.21	34.54	51.64	68.69
Water Inlets (Hot & Cold)	1-1/4" NPT	2" NPT	2" NPT	2" NPT	2" NPT
Steam Inlet	3/4"	1"	1"	1"	1"
Drain	4" N.O.	6" N.O.	6" N.O.	8" N.O.	8" N.O.
Extract Motor HP	2.75/5.5 h.p.	7.5/7.5 h.p.	7.5/7.5 h.p.	10/15 h.p.	10/15 h.p.
G-Force at High Extract	232 G	229 G	229 G	232 G	248 G
Circuit Breaker	30 Amp	50 Amp	50 Amp	100 Amp	100 Amp
Control Programs	HMI Touch Screen 50	HMI Touch Screen 50	HMI Touch Screen 50	HMI Touch Screen 50	HMI Touch Screen 50
Features	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting	Productivity Reporting
<b>Dimensions</b> (overall)					
Width	92"	100"	100"	104"	110"
Depth	48"	50"	57"	67"	67"
Height	70"	72"	72"	81"	89"
Net Weight	5,200 lb.	7,200 lb.	7,380 lb.	9,375 lb.	12,200 lb.

Standard voltage is 230/3/60. Consult factory for other available electrical voltages.

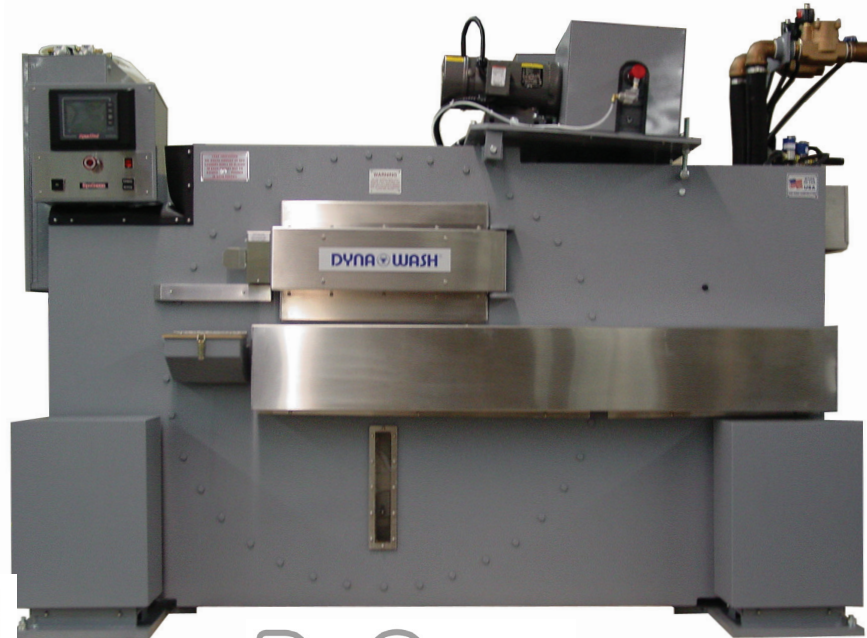

EQUIPPED WITH DYNATROL HMI TOUCH SCREEN

## DynOzone

EQUIPPED WITH THE REVOLUTIONARY  
DYNOZONE - DYNAWASH® OZONE SYSTEM



EXCLUSIVE "3-D" THREE POCKET  
BASKET DESIGN

[WWW.EDRODYNAWASH.COM](http://WWW.EDRODYNAWASH.COM)

**The EDRO Corporation**  
37 Commerce Street - P.O. Box 308  
East Berlin, CT 06023-0308 USA

Fax (860) 828.5984 Phone (860) 828.0311